

FL-TVI16D502MVFB

HD1080P Turbo HD Outdoor Vari-focal EXIR Bullet Camera




EXIR



Key Features

- HD1080P Video Output
- Adopt HDTVI Technology
- True Day/Night
- 2.8 ~ 12mm vari-focal lens
- OSD menu, 3D DNR, Smart IR
- Up to 50m IR distance
- Up the Coax (via coaxial cable)
- 120 dB Wide Dybamic Range

Dimensions

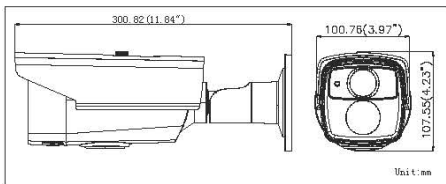

Accessories



Video balun
DS-1H18

FL-TVI16D502MVFB

CAMERA

Image Sensor	1/3" Progreesive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1920(H)*1080(V)
Min. Illimination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutler Speed	1/25 s to 1/50,000 s
Lens	2.8 - 12mm @ F1.4 Angle of view: 92° - 32°
Lens Mount	φ 14
Day & Night	ICR
Wide dynamic range	120 dB
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 25fps/1080p @ 30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output (75Ω / BNC)
S / N Ratio	More than 52dB

MENU

Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT
Camera ID	One/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/off, maximum 8 zones
Motion Detection	On/off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English, Japanese, CHN1, CHN2, Korea, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew & Arabic
Function	Eclipse, Digital noise reduction, Digital zoom (62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM

GENERAL

Working Temperature/ Humidity	-30 °C - 60 °C (-22 °F -140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC ; -A: 12 VDC, 24 VAC
Power Consumption	12VDC : Max, 7W ; 24VAC : Max. 8.5W
Weather Proof Ratings	IP66
IR Range	Up to 50m
Communication	Up the coax (need UTC controller) Protocol : Pelco-C(Coaxitron)
Dimensions	300.82x100.76x107.55mm (11.84"x3.97"x4.23")
Weight	700g (1.54 lbs)